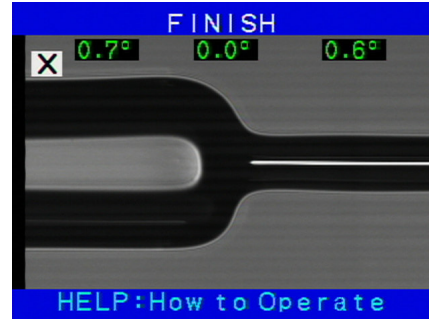
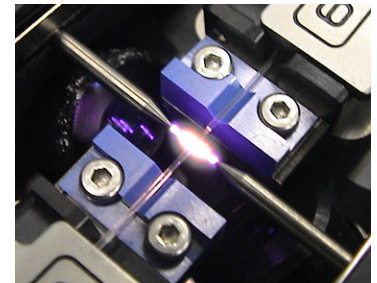


***PM Fiber Arc Fusion Splicer for Large Diameter Fiber
FSM-45PM-LDF***400-125 μ m splicingHigh Power Arc Discharge
(Fibers are 400 μ m glass)

The FSM-45PM-LDF is designed for splicing of large diameter fibers.

The FSM-45PM-LDF is equipped with high power arc discharge unit and wide view CCD camera to perform large diameter fiber splicing. The FSM-45PM-LDF is modified based on FSM-45PM. All the functions of FSM-45PM, such as splicing capability for polarization maintaining fibers, are also available. In order to perform high power arc discharge, two pieces of AC adapters are required, thus they are supplied as standard set.

Features:

1. Specialized for LDF splicing up to 500 μ m cladding diameter.
2. High power arc discharge and wide view CCD camera.
3. Automatic theta alignment for polarization maintaining fibers.
4. Core-to-core fiber alignment system with PAS technology.
5. V-groove Driving System for various type of fiber diameter.
6. Short cleaved length splicing capability.
7. Splice loss estimation function.
8. Cross talk estimation function for polarization maintaining fiber splicing.
9. Sweep arc function for various kinds of dissimilar fiber splicing.
10. Power monitor feedback alignment capability with GP-IB interface.
11. USB terminal and serial port for PC communication.

SPECIFICATIONS (Tentative)	
Applicable fibers	Large diameter fiber, PM (PANDA, Bowtie, TIGER), SM, MM, NZDS, DS
Fiber count	Single
Cladding diameter	80 μ m to 500 μ m
Coating diameter	100 μ m to 1,000 μ m
Fiber cleaved length	8mm to 10mm (standard), 3mm to 5mm (short cleaved length)
Actual average splice loss	0.07dB with PANDA, 0.07dB with TIGER, 0.07dB with Bowtie, 0.03dB with SM, 0.02dB with MM, 0.05dB with DS (with bare fiber clamping)
Average cross talk	-35dB with PANDA, -27dB with TIGER, -24dB with Bowtie
Splice time	35sec. with 400 μ m LDF, 45sec. with PANDA, 90sec. with TIGER, 110sec with Bowtie, 20sec with SM
Return loss	>>60dB
Splicing modes	40 user programmeble modes and 120 database (factory predetermined setting)
Splice loss estimate	Available
Attenuation splice function	0.1dB to 25dB
Storage of splice result	The last 1,200 splices to be stored in the internal memory
Fiber display	X/Y, or X and Y simultaneously
Magnification	135x for single X or Y view, or 67x for X and Y view
Viewing method	Two CCD cameras and 5 inch TFT color LCD monitor
Operating condition	0 to 3,500m above sea level 0 to 95%RH and 0 to 40 degree C respectively
Mechanical proof test	2.45N
Tube heater	Built-in tube heater with 10 heating modes and 20 database area
Tube heat time	Typical 100sec with FP-03 protection sleeve Typical 70sec with series of micro sleeves
Applicable protection sleeve length	60mm, 40mm, and a series of micro sleeves
Power supply	Auto voltage selection from 100 to 240Va.c. with two ADC-10s
Terminals	USB 1.1 (type B) and RS232C for PC communication GP-IB port for power monitor feedback alignment Video terminal RCA video jack / NTSC
Wind protection	Max. wind velocity of 5m/s.
Dimensions	332W x 218D x 234H (mm) in operation
Weight	6.1kg without AC adapter

STANDARD PACKAGE (Tentative)		OPTIONAL ITEMS (Tentative)		
Arc fusion splicer	FSM-45PM-LDF	Fiber holder	FH-40-xxx	FH-40-100,125,150,180,210 250,300,350,400,500 600,700,800,900
Fiber holder	FH-40-250 FH-40-400			
Fiber clamp	CLAMP-45-80/400 CLAMP-45-125 CLAMP-45-250 CLAMP-45-400	Fiber clamp	CLAMP-45-xxx	CLAMP-45-600,900
AC adapter (2pcs.)	ADC-10	Fiber cleaver	CT-32 CT-38	for 125 μ m cladding fiber for 80 μ m cladding fiber
AC power cord (2pcs.)	ACC-08~12	Cleaver spacer	SPA-40-CT-040 SPA-40-CT-050	for 9mm cleave length for 10mm cleave length
Carrying case with Z unit fixture	CC-05-45PM ZFIX-01	Thermal jacket stripper	HJS-02 HJS-02-80	for 125 μ m cladding fiber for 80 μ m cladding fiber
Spare electrode	ELCT2-25	Jacket stripper	JS-02-900	for 900 μ m jacketing
Hexagonal wrench	HEX-01	Stripper spacer	SPA-40-HJS030	for short cleave length
Top plate rubber cap	CAP-01	External controller	CO-01	
Transfer holder	-			
Instruction manual	-			

Specifications and descriptions are subject to change without prior notice.